


Fibre Lead Crossover Instruction

Technical Information

Important Note


Manufacture leads are clipped in the straight through form, meaning A is connected through to A and B is connected through to B as shown below.

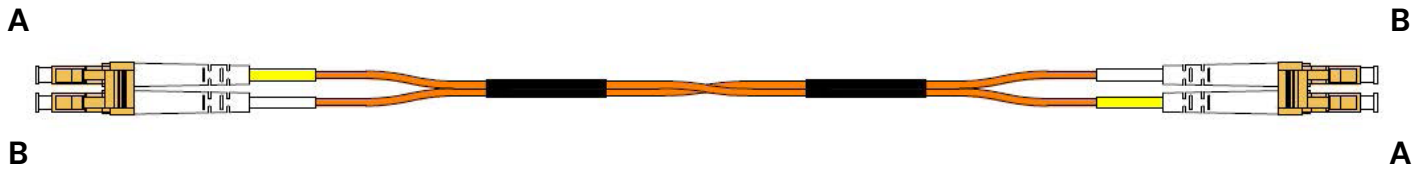

Cross Over Configuration

Based on the desired use of the lead, you may need to introduce a cross over such that A on one end connects to B on the other end. To facilitate this the lead has been manufactured with a removable clip. The cross over is put in place by modifying the position of the connectors at one end of the cable only.

1. Remove the connectors from the clip at one end
2. Swap the connector position
3. Re-insert into clip

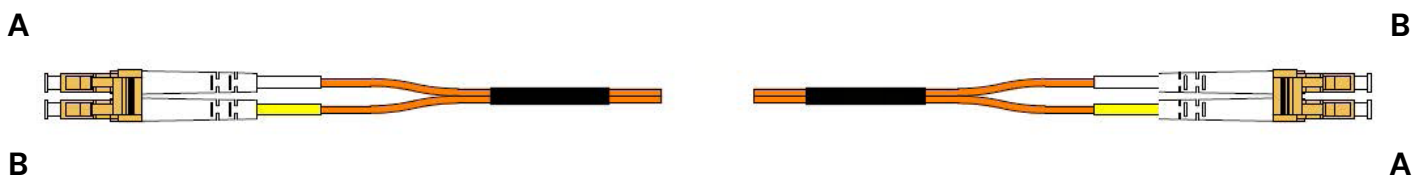

*The illustrations show both connectors with the latch mechanism facing up.

